POL-EKO APARATURA®

Brand NEW BOD incubators for Oxi-Top system ***ST series***

BOD incubators specification:

- Microprocessor controller with LCD graphic display
- Cooling and heating system
- Temperature range +3...+40°C
- Temperature resolution 0,1°C
- Forced convection
- Solid door (glass door-option)
- Access port (30 mm)
- Open door alarm
- Internal LED light
- Internal memory to store up to 2046 data records
- Housing – powder coated sheet
- Interior – aluminium
- Adjustable hold at set point time for temperature from 1 min to 30 days or continuous operation
- Audible and visual temperature alarm
- Temperature sensor fail alarm
- Power failure control system
- Real time clock

three different models available:

		ST 2	ST 4	ST 5
chamber capacity [l]		150	250	300
working capacity [l]		122	203	243
overal dimensions [mm]	width A	620	620	620
	height B	860	1260	1460
	depth C	650	650	650
	width D	480	480	480
	width D'	520	520	520
internal dimensions [mm]	height E	660	1060	1260
	depth F	420	420	420
	depth F'	480	480	480
	depth G	320	320	320
	height H	440	840	1050
interanal socket		2	3	4
Max OxiTop		2(IS 12)	3(IS 12)	4(IS 12)
shelves (wire coated)		2	3	4

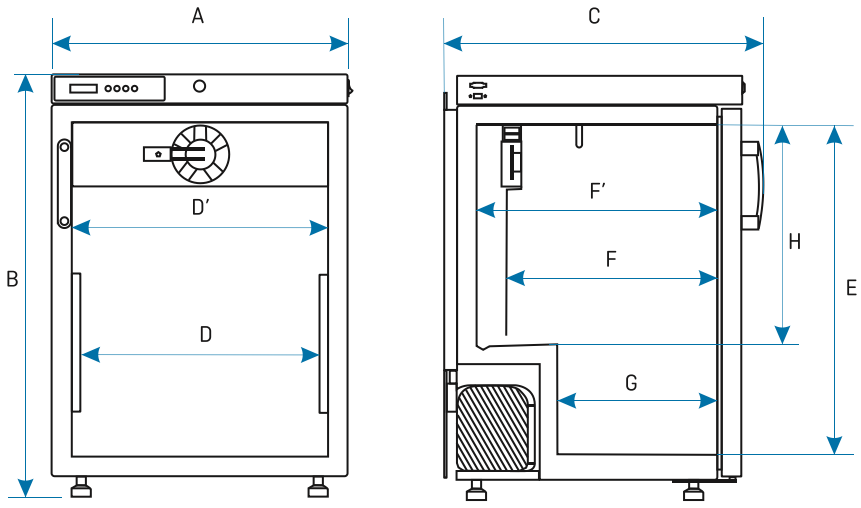

Want to see more? Watch our company video!

POL-EKO APARATURA sp.j.
ul. Kokoszycka 172C
44 - 300 Wodzisław Śląski
Tel: +48 32 453 91 70
Fax: +48 32 453 91 85
E-mail: export@pol-eko.com.pl
www.pol-eko.eu